

SS634 Series Low Cost OEM Level Transmitter

Application

- 1, City Water Supply 2, Building Automation
3, Petrochemical Pipeline 4, Constant Pressure Water Supply

Features


- 1, Low Cost 2, Various Outputs
3, Compact Design 4, Integrated Construction
5, Low power consumption 6, High reliability and stability



Performance & Parameters

Supply Voltage	12~36 VDC;
Output Signal	4-20mA; 0-5V; 0~10V;
Pressure Range	1m,3m,5m,10m,15m,20m,50m;
Proof Pressure	1.5×FS pressure
Accuracy	0.25%; 0.5%;
Stability	0.2%Full Scale
Compensated Temp	0~70°C
Operating Temp	-10~80°C
Electrical Connection	PVC Cable
Sealing Rating	IP68
Housing	Stainless Steel

Dimensions

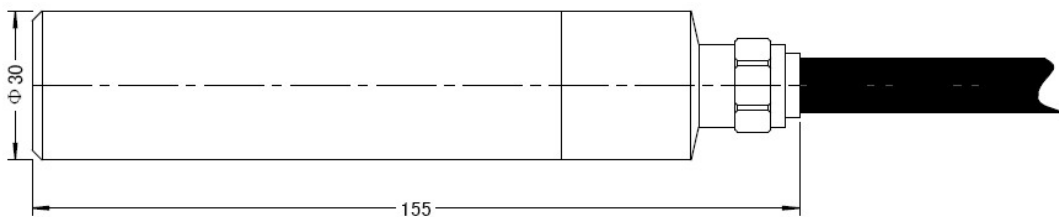

Ninghai Sendo International Trading Co.,Ltd

NO.62,Xinghai Road,Yuelong Street,315600 Ninghai,China

Phone:+86-13616574884 Fax:+86-574-88410716

E-mail: cain.chen@sendo-sensor.com

www.sendo-sensor.com

